

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)



Eur päisches Patentamt
Eur pean Patent Office
Office européen d s brevets

(11) Publication number:

0 193 226
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 86200197.1

(51) Int. Cl.⁴: **B 01 D 9/02**
C 02 F 1/22

(22) Date of filing: 11.02.86

(30) Priority: 15.02.85 EP 85200193

(43) Date of publication of application:
03.09.86 Bulletin 86/36

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(71) Applicant: Gist - Brocades N.V.
Wateringseweg 1 P.O. Box 1
NL-2600 MA Delft(NL)

(72) Inventor: Thijssen, Henricus Alexis Cornelis
Röntgenlaan 2
NL-5691 GK Son(NL)

(74) Representative: Van der Straaten, Jan Anthony et al,
c/o GIST-BROCADES N.V. Patents and Trademarks
Department Martinus Nijhofflaan 2 P.O. Box 1
NL-2600 MA Delft(NL)

(54) Apparatus and process for separating solid particles from a liquid suspension and/or for the purification or leaching of solid particles.

(57) Apparatus for separating solid particles from a liquid suspension and/or purification or leaching of solid particles, consisting of a cylindrical column (1) which near one end is provided with a rotatable scraper (4) for the disintegration of a washed compacted bed (2), an inlet (27) for wash liquid and an outlet (16) for the disintegrated particles, and contains near the opposite end of the column, means (8) for supplying liquid suspension, a non movable screening device (3), which screening device is only permeable for the suspension liquid and an outlet (9) for the liquid.

The process for separating the solid particles in the column is based on the intermittent supply of pressurized suspension to the apparatus which pressure supplies the energy required for feeding the suspension near one end into the column, the squeezing of the suspension liquid out of the suspension under withdrawal of the suspension liquid from the column near that same end of the column, the compaction of the solid particles, the transport of the compacted bed of particles towards the opposite end of the column and the washing of the compacted bed with wash liquid, the bed is mechanically disintegrated, the product of this disintegration is removed in suspended form while maintaining a wash front separating the non washed and washed parts in the compacted bed.

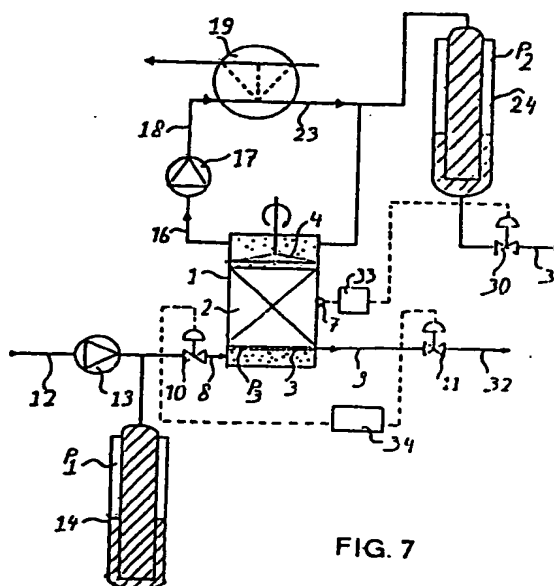


FIG. 7

0193226

2393

Gist-brocades nv

APPARATUS AND PROCESS FOR SEPARATING SOLID PARTICLES FROM A
LIQUID SUSPENSION AND/OR FOR THE PURIFICATION OR LEACHING OF
SOLID PARTICLES

The invention relates to an apparatus and a process
for separating solid particles from a liquid suspension and/or
for the purification or leaching of solid particles.

A method for separating crystals from a suspension
5 and washing the crystals with a wash liquid, in a continuous
packed bed wash column is described in the British patent
application GB 2,023,564. Mechanical means are used to move
continuously the bed of crystals in counter currence with the
wash liquid. This may be accomplished by applying rotating
10 tilted hollow vanes attached to a shaft. These vanes are
provided with a screen. The aqueous solution is withdrawn
through the hollow screened vanes. Disintegration of the bed
of crystals is accomplished by melting or by using scrapers.

This apparatus is not suitable for separating soft
15 crystals, like fats and fatty acids from their mother liquid
because the action of the rotating vanes results in a
destruction of the crystals.

This drawback is not encountered in the apparatus
and process described by the United States patent no. 3872009,
20 in which the suspension is batch-wise introduced. The column
consists of a cylinder closed at one end by a piston. This
piston is used to compact the solid particles and to squeeze
the suspension liquid out of the suspension. During that
compaction stroke the suspension is pressed against a surface
25 near one of the ends of the column, which end is provided with
a screen through which suspension liquid is withdrawn. In the
next phase the compacted solid particles are displaced in the
direction of the other ends of the cylinder. During the last

ment in the phase the compacted bed is disintegrated by melting and scraping. During the subsequent suction stroke the piston is released from the compacted bed and fresh suspension is drawn into the space between the surface provided with the screen and the compacted bed.

A drawback of this batch-wise acting wash-column is the complicated construction of the reciprocating piston and its limitation with regard to scaling up to column diameters above e.g. 50 cm.

10 As a result of extensive research and experimentation an improved column, a complete equipment of which such column forms an essential part, as well as a method for separating solid particles from a liquid suspension and/or purification or leaching out of solid particles in a column, 15 are provided in order to avoid the before depicted disadvantages of the equipment presently available according to the state of the art.

Therefore the present invention is relating to an improved column for separating solid particles from a liquid 20 suspension and/or purification or leaching of solid particles, consisting of a cylindrical column closed at both ends by a fixed wall or a lid, provided near one end with a rotating scraper for the disintegration of a washed compacted bed, means for supplying wash liquid and means for removing 25 suspended solid particles, and near the opposite end of the column provided with a non movable screening device for supplying pressurized liquid suspension, the withdrawal of liquid from the suspension out of the column and the transport of the compacted bed of solids, which screening device 30 consists of two parallel circular plates, mounted perpendicular to the axis of the column and having diameters equal to the inner diameter of the column of which part of the plate facing the scraper is permeable for liquid and not permeable for the suspended solids, where the other part of 35 that plate contains channels which extend into the other parallel plate, which channels are the inlet ducts supplying suspension, have no open connections to the space enclosed by the two parallel plates and which channels have a diameter which is at least

0193226

ne rder larger than the diameter f the perforations in the plate facing the scraper.

In this c lumn the liquid suspension is expelled via a screening device situated in the column. The pulsewise 5 m ving compacted bed is disintegrated and the product of this disintegration is removed.

From a viewpoint of construction costs, a preferred embodiment of such a column is characterized in that the other parallel plate of the screening device not facing the scraper 10 is not identical with the fixed wall closing the cylinder, and the channels connect the spaces at both sides exterior to the parallel plates and the space between the other parallel plate and the wall closing that end of the cylinder comprises a means for supplying the liquid suspension.

15 However even attractive results can be obtained with an alternative embodiment of a column, characterized in that the other parallel plate of the screening device not facing the scraper, is formed by the fixed wall closing of that end of the cylinder.

20 The present invention will now be further described with reference to the accompanying Figures.

Figures 1, 7 and 8 schematically show a possible embodiment of the equipment to be used for carrying out the process of the present invention and of which the wash column 25 is forming an essential part.

Figure 2 schematically shows a possible embodiment of the wash column including a screening device.

In Figures 3-6 some possible embodiments of the screening device are shown in schematical form.

30 In columns for the separation and/or purification f solid particles from a suspension in which liquid suspension is fed pulsewise, the compacted bed must be released from the screening plate at the beginning of the feeding phase.

0193226

It will be appreciated by people skilled in the art that an advantage of the equipment and process of the present invention is relating to the feature, that all actions within the wash column are controlled by the pressure P_1 by means of which an automatical adjustment is reached under differing process conditions.

According to one of the specific embodiments of the wash column of the invention as depicted in Fig. 2, this column is improved by providing it with a screening device 3 consisting of two parallel plates 103 which plates are situated between the compacted bed and the suspension inlet (Fig. 3-5).

Channels 101 between these plates connect the spaces on either side of the screening device. The channels have a diameter large enough to let the suspension pass. These channels do not have open connections with the space enclosed by the screening plates. The channels are preferably formed by hollow cylinders perpendicular to the screening plates. The diameter of the perforations 102 and/or the surface fraction of the perforations of the screening plate next to the suspension inlet has to be substantially smaller than the diameter of the perforations and/or the surface fraction of the perforations of the other opposite screening plate. The diameter of the perforations must be small enough to prevent that solid particles are pushed through these perforations. The friction of the suspension through the channels must be much smaller than the friction of the liquid phase through the two screening plates. The diameter of the channels is preferably between 0.2 and 10 cm, depending on the kind of liquid suspension. For example in the case of aqueous suspension the diameter of the channels is preferably between 0.5 and 3 cm.

At the beginning of the feeding phase the compacted bed rests on the screening device. When liquid suspension is fed, the liquid phase presses equally against the whole surface area of the compacted bed as a result of the permeability of the screening plates. The bed is uniformly and simultaneously released from the screening plate. Subsequently the supplied liquid suspension flows through the channels 101 between the

0193226

screening plates into the space between the compacted bed and the screening device, meanwhile lifting this bed.

In an alternative embodiment the screening device is provided with a screening plate 103 at the side of the compacted bed, while on the opposite side the screening device is closed by a plate 105 without perforations, which is movable in the direction of the opposite plate. At the beginning of the feeding phase the liquid suspension presses against plate 105. By the resulting movement of the plate the liquid phase is pressed out of the screening device via perforations 102, releasing the compacted bed from the screening device. The movable plate 105 returns to its original position when the pressure drop over the screening device decreases, for example by its own weight or by means of springs 104.

In a second alternative embodiment the screening device is provided with a screening plate 103 at the side of the compacted bed, while on the opposite side the screening device is provided with an flexible membrane 106 which is not permeable for liquid. By supplying liquid suspension the membrane is moved from position 106a under influence of the pressure drop to position 106b. The liquid phase is pressed out through the perforations 102, releasing the compacted bed from the screening device. After the pressure drop over the screening device is vanished, the membrane returns in position 106a.

The liquid phase separated from the solid particles is drained off from the space between the screening plates.

It will be appreciated that according to an additional alternative embodiment of the present invention a screening device according to Figure 6 is included in the wash column. Such a screening device is essentially consisting of one screening plate, while the supply of liquid suspension from a central feed pipe actually takes place through a plurality of channels, emanating from a central feed pipe.

Upscaling to any other industrial-useful scale will smoothly proceed because movable parts in the column are embodied which have to supply the force necessary to transfer the compacted bed and the suspension. In an embodiment of

the invention which will be described by means of the Figure 1 unless indicated otherwise, the driving force is supplied by an external pump 13. Also the use of the screening device 3 excludes difficulties in upscaling. The pump 13 is admittently 5 or continuously pumping to maintain increased mean pressures P_1 and P_2 where automatically P_2 will remain smaller than P_1 .

The wash column is used pulse wise. The cycle in the process of the present invention can be divided in two phases, viz. a feeding phase and a compacting/washing phase. 10 The feeding phase, succeeding the washing phase, starts when a signal of detector 7 is obtained indicating that the wash front in the compacted bed, the dividing plane between the liquid solution and the wash liquid, has reached the first outmost limit at detector 7. In one embodiment sensing 15 devices, in themselves known, record the concentration difference that exists between the liquid solution and the wash liquid (for example photo-electric cells). In another embodiment sensing devices, known per se, record the temperature difference that exists between the liquid solution and the 20 wash liquid (for example thermocouples or infrared detectors). The signal is processed by a level controller 40.

After said signal of detector 7, valve 11 is closed and shortly later valve 10 is opened. Between the valve 11 is closed and the valve 10 is opened, a time delay may be 25 introduced by a timer 34. Because of the pressure difference between the pressure P_1 in expansion vessel 14 and the pressure P_2 in expansion vessel 24, the suspension is fed into wash column 1 via feed line 8 and the compacted bed is lifted. Because of this pressure difference the compacted bed is 30 pushed against the rotating scraper 4 (for example a disk provided with knives), by which the upper layer of the washed compacted bed is disintegrated. Because of this pressure difference over the compacted bed the liquid solution is transported in respect of the compacted bed in the direction 35 of the scraper, so the washfront is moving somewhat faster than the compacted bed in the direction of the scraper.

0193226

At the beginning of the feeding phase pressure p_2 in expansion vessel 24 has reached its lowest value during the whole cycle and valve 30 is closed. During the feeding phase pressure P_2 is increased up to a chosen maximal value of
5 pressure P_2 , then pressure controller 29 actuates valve 30 and the pressure P_2 remains constant at the chosen maximal value. The actuation of valve 30 is also possible by a level controller of the liquid in expansion vessel 24, using the relation between pressure P_2 and the gas volume above the liquid in
10 expansion vessel 24.

The feeding phase is ended and the compacting/washing phase is started when detector 6 gives a signal to the level controller 40 that the washfront has reached the second outmost limit. At the beginning of the compacting/washing
15 phase valve 10 is closed and valve 11 is opened. Between the time valve 10 is closed and valve 11 is opened, a time delay may be introduced by timer 34. The driving force, responsible for the transport of the liquid phase through the screening plates out of the column and for the movement of the washfront
20 in the direction of the screening device during the compacting/washing phase, depends on the difference between the values of pressures P_2 and P_3 .

In consequence of this difference in pressure between P_2 and P_3 , P_3 is the pressure in the outlet of the screening
25 device, the liquid phase is transported through the screening plate, while the solid particles remain behind and are pressed together as a compact layer. Already during this compacting, but especially afterwards, the washfront moves as a result of the pressure drop over the compacted bed, in the direction of
30 the screening device until the level is reached where detector 7 is situated. Detector 7 gives the signal that the washfront has reached the first outmost limit and the cycle starts again. This cycle of the washfront takes about 0.1 to 40 seconds.

A part of the compacted bed from the side which is situated opposite to the side which joins the screening device has to be removed during the cycle in order to prevent unlimited expansion of the compacted bed. According to the invention the column is provided with a scraper 4 (for example a radial rotating disk provided with knives). Several scrapers suitable for such a purpose can have several forms, as known in the art. The scraper disintegrates that part of the washed compacted bed which is pushed against this scraper. The scraped product, solid particles created by disintegration, is flushed out by wash liquid. This suspension is melted in heat exchanger 19 and the formed clean liquid is pumped around by pump 17 at a pressure P_2 and can be recycled as wash liquid.

By means of a temperature sensor 22 the heat supply, supplied by heat exchanger 19, is controlled for example by valve 21 in heating liquid supply line 20 and a temperature is adjusted for the wash liquid, which is for example maximally 3°C warmer than the melting temperature of the washed solids obtained in column 1. For example using water as wash liquid the temperature is maximally 1°C above the melting point of the ice crystals supplied by column 1.

In the last part of the feeding phase, when pressure P_2 has reached its maximal value, a part of the recycled wash liquid is drained off by valve 30.

In one embodiment of the invention the radial rotating scraper is movable in axial direction. The scraper is situated above the compacted bed and its weight pushes on the compacted bed. The setting force of the knives of the scraper is supplied by the weight of the scraper. In general the scraper is preferably movable in the direction of the axis of the cylindrical column to give a pressure on the knives to disintegrate the washed compacted bed in an optimal way.

In an alternative embodiment the scraper is not movable in axial direction and has a relatively high scraping capacity. During the feeding phase the compacted bed is pushed against the scraper as a result of the pressure difference over the compacted bed. The scraping will continue to at the end of the feeding phase.

To keep the solid particles near the inlet of the screening device in suspension, a stirrer 5 can be mounted. Stirrers 15 and 25 may also be mounted in the expansion vessels 14 and 24, respectively.

Fig. 7 shows a somewhat alternative arrangement according to the invention different from that presented by Fig. 1. The buffers indicated by 14 and 24 consist of two coaxial cylinders of which the inner one at the end extending into the outer cylinder is open, and the outer one is closed at both ends. The annulus remains partly filled with gas. The suspension is fed into the top of the vertically placed inner cylinder during compression, and leaves that top during expansion.

In case of the ice crystals suspended in an aqueous solution, the crystals tend to float in the upper part of the inner cylinder. During the compression of the gas phase the entering suspension fluidizes the floating crystals, and during the expansion phase the suspended crystals are preferentially removed.

With this arrangement suspensions in liquid of which the density of the suspended particles is lower than the liquid density, can be ideally buffered and do not require stirring.

Also the process control according to Fig. 7 is principally different from that according to Fig. 1. The column contains only one sensor 7, which indicates whether the wash front is above or below the position of the sensor. In case the wash front passes below the level of the sensor, meaning that, due to a too high pressure P_2 , the wash front is pushed away from the scraper, the signal of the sensor starts to open valve 30. The increased flow of melted crystals leaving via 31 results in a gradual decrease of the pressure P_2 . As soon as the wash front rises above the sensor, valve 30

0193226

is closed, resulting in an increase of pressure P_2 . The feeding of suspension to the column and the withdrawal of liquid is controlled by the valves 10 and 11 respectively, which in turn are actuated by a timer 34. Practical sequences for valve 10 are for example: periods of from 0.05-9 seconds and preferably 0.5 seconds open while valve 11 is closed, followed by a dead time interval of from 0.05-0.5 and preferably 0.1 seconds during which both valves 10 and 11 remain closed, succeeded by a period of from 0.05-30 seconds preferably of 2 seconds that only valve 11 is open; again a dead time interval of between 0.05-0.5 and preferably of 0.1 seconds, after which the cycle is repeated. During the interval that valve 10 is in open position, the suspension is fed to the column, passes through the channel 101 (see Fig. 2) and lifts the compacted bed of crystals 2. When valve 10 is closed and valve 11 in open position, the positive pressure difference $P_2 - P_3$ expels liquid from the freshly introduced suspension in the wash front via the inner sieve surface 103 to the liquid outlet 32. Subsequently the wash front moves towards the screening device until sensor 7 actuates valve 30 which then starts to open, thus bringing the moving wash front to a stand-still. The wash pressure P_2 is not adjustable independently but wholly determined by feeding capacity and concentration of suspended solids in the feed and the suspended particle size and shape distribution.

It will be appreciated that the wash columns according to the present invention will operate in the described advantageous way with a varying height of the column between 10 and 200 cm. Preferred heights of these columns are lying between 25 and 100 cm for most practical conditions. The diameter of the column may vary from 10-100 cm and preferably from 15-25 cm.

0193226

The wash column will preferably be used in a vertical state, i.e. in the direction of the axis. However, good operation can be reached in both the situations that the scraper is in the top of the cylinder or in the bottom of the 5 cylinder.

The wash column of the present invention may give attractive results for the concentration of aqueous solutions and separation of ice crystals. However, other two phase (liquid/solid) systems like e.g. fatty acids, paraxylene in 10 liquid and solid form may be treated with the same results.

The invention is illustrated by the following examples, however without a restriction of the scope of the invention to these embodiments.

EXAMPLE 1

Ice crystals are formed in a directly cooled crystallizer which is continuously fed with a sucrose solution of 1 wt% in water and in which crystallizer that solution is concentrated upto 8 wt% dissolved sucrose. The direct cooling is obtained by injection of liquid butane in the stirred aqueous solution. The solution is kept at an absolute pressure of 0.95 bar. At a residence time of the crystals of 25 minutes the mean particle diameter of the ice crystals is $250\mu\text{m}$. That crystal suspension containing 20 wt% crystals is continuously fed to wash column 1, according to Fig. 7. The feeding rate of the suspension is 650 kg/h and the corresponding ice feed rate 130 kg/h.

The wash column 1 has an inner diameter of 15 cm and a total length of 100 cm. The rotating scraper 4 is movable in axial direction of the column over a length of 5 cm. By means of a pneumatic system it presses with an overpressure of 0.4 bar against the vibrating compacted ice crystal bed 2. The minimum distance between the scraper and the screening device is 75 cm. The screening device consists of two parallel sieve plates, which are connected by pipes having an inner diameter of 1.0 cm and are situated in a triangle arrangement at a mutual distance of 3.0 cm. The holes in the sieve plates facing the compacted bed of crystals are $100\mu\text{m}$ and the free surface area is 10%. The holes in the other sieve plates are $50\mu\text{m}$ and the free surface area is only 1%. The sensor 7 is a photocell. The opening and closing periods of the ball valves 10 and 11 in the suspension inlet 8 and the liquid outlet 9 are controlled by the cycle timer 34. In the present example the periods are: valve 10, 1 second in open position followed by a dead time of 0.1 seconds that both valves are closed, subsequently followed by valve 11 during 2 seconds in open position and thereupon again a dead time interval of 0.1 seconds that both valves are closed again. After this last interval the cycle is repeated.

Under the conditions mentioned the mean pressure P_1 is about 2 bars overpressure, the exit pressure for the liquid leaving the screening device 3 via 9, valve 11 and 32 is atmospheric and the mean pressure P_2 of the liquid above the 5 scraper is about 0.5 bars overpressure.

During the feeding phase the compacted ice bed is lifted from the screening device by about 3.3 cm. The wash front is lifted by about 3.5 cm. The lifting of the compacted ice crystal bed occurs absolutely evenly and the interface 10 separating the compacted bed from the freshly introduced crystal suspension remains parallel with the surface of the screening device. At the feed rate of 130 kg ice crystals per hour, which is equivalent to a capacity of 7357 kg ice/m² column cross section per hour, a very stable and horizontal 15 wash front is obtained. The sucrose concentration in the melt of the washed ice crystals leaving the column at 31 amounts to about 10 ppm. The mother liquid leaves the column at 32 at a concentration of 8 wt%.

EXAMPLE 2

About the same wash column as described in Example 1 is used for the separation and purification of para-xylene crystals out of a suspension of those crystals in a mother liquid containing the isomers of para-xylene and ethyl benzene. Differences with the wash column according to Example 1 are: (1) the scraper is not movable in the axial direction of the wash column and rotates at a higher speed and (2) other configurations of the buffer vessels 14 and 24. For the buffering of the suspension of para-xylene crystals the inner cylinders are removed and the joined inlet and outlet is at the bottomside of the cylindrical buffer vessel. The crystal suspension leaving the crystallizer at a temperature of 0°C contains 25 wt% para-xylene crystals, the concentration of para-xylene dissolved in the mother liquid amounts 69 wt%. The mean particle size of the crystals is 160 μ m. The feed rate of the suspension to the wash column is 500 kg/h and the corresponding para-xylene crystal feed rate 125 kg/h. The cycle sequence is: valve 10, 2 seconds in open position followed by a dead time of 0.1 seconds, then both valves 10 and 11 are closed, subsequently followed by valve 11 during 2 seconds in open position and thereupon again a dead time interval of 0.1 seconds that both valves are closed again.

Under the conditions mentioned the mean pressure P_1 is about 4 bar overpressure, the exit pressure for the liquid leaving the screen device via 9, valve 11 and 32 is atmospheric and the mean pressure P_2 of the liquid above the scraper is about 3.0 bar overpressure. The washfront separating in the compacted crystal bed the zone where the interstices are still filled with mother liquid of 0°C and the zone where the mother liquid has been replaced by the melt of pure para-xylene crystals of 13°C is kept somewhere in the middle of the column. The purity of the melt leaving the column at 31 amounts 99.98 wt%.

EXAMPLE 3

The wash column according to the invention is used to purify sodium chloride from its adhering mother liquid. The suspension of mother liquid and crystals contains at a temperature of 60°C, 29 wt% crystals. The mother liquid contains 38 wt% dissolved sodium chloride, 58 wt% water and 4 wt% dissolved impurities like sodium sulphate. The mean crystal diameter is defined by:

10

$$\frac{1}{\bar{d}} = \sum \frac{x_i}{d_i}$$

in which x_1 is the weight fraction of the crystals with diameter d_1 . The mean crystal diameter is 195 μ m.

In the wash column the crystals are separated from their mother liquid and subsequently countercurrently washed with the saturated solution of pure sodium chloride crystals in demineralized water. The example will be elucidated with aid of Fig. 8. The wash column 1 is a cylinder with a total length of 100 cm and an inner diameter of 15 cm. The rotating scraper 4 is movable in the axial direction of the column over a length of 6 cm. By means of a pneumatic system it presses with a pressure of 0.05 bar against the vibrating compacted bed of sodium crystals 2. The minimum distance between the scraper and the screening device 103 is 74 cm. The screening device consists of two parallel sieve plates, which are connected by pipes having an inner diameter of 1.0 cm and are situated in a triangle arrangement at a mutual distance of 30 cm. The holes in the sieve plates facing the compacted bed are 150 μ m and the open surface area occupied by the holes is 10%. The holes in the other sieve plates are also 150 μ m but the open surface area is only 1%. The wash column is mounted vertically with the screening device in the upper part of the column. The vessels 71 and 85 are buffer vessels. 80 is an open storage vessel supplied with a liquid level indicator 82. The crystals are separated from the saturated solution of pure sodium chloride crystals in pure water in the decanter centrifuge 74 which contains a helical conveyor.

The suspension of sodium chloride crystals in
m ther liquid is continuously fed to the column with pump 13
at a rate of 850 kg/h. The opening and closing periods of th
ball valves 10 and 11 in the suspension inlet 8 and the liquid
5 outlet 9 are controlled by the cycle timer 34. In the present
example the periods are: valve 10, 0.5 seconds in open
position followed by a dead time of 0.1 seconds that both
valves are closed, subsequently followed by an open position
of valve 11 during 2 seconds and thereupon again a dead time
10 interval of 0.1 seconds that both valves are closed. After
this last interval the cycle is repeated. The washed and
purified crystals are scraped from the compacted bed with
scraper 4 and suspended in the recirculating saturated
solution introduced via 27 and leaving the column via 16.
15 Between 16 and 73 a pilot valve is installed which is
controlled by the level indicator 82 in the open buffer vessel
80. If the level of the liquid 81 in vessel 80 becomes lower
than the desired value, valve 72 is further opened and when
the liquid level raises above the desired level, valve 72 is
20 further closed. Pure demineralized water is introduced in the
system via 77 and dosing pump 78 into 16 and subsequently 73.
The crystals are seperated from the saturated solution with
the aid of decanter centrifuge 74. The slightly wet purified
crystals leave the centrifuge via 75. The saturated liquid is
25 recirculated via buffer vessel 80, pump 17 and 27 to the
bottom end of the wash column. Dosing pump 78 is adjusted such
that the reflux of liquid in the compacted bed 2 amounts 1% of
the flow of crystals on dry basis. In the present example this
is per hour $0.01 \times 0.29 \times 850$ is 2.5 kg water saturated with
30 sodium chloride. The impurities of the wet crystals leaving
the decanter centrifuge at 75 amounts to less than 0.01 wt%.

0193226

CLAIMS

1. A column for separating solid particles from a liquid suspension and/or purification or leaching of solid particles, consisting of a cylindrical column closed at both ends by a fixed wall or a lid, provided near one end with a rotating scraper for the disintegration of a washed compacted bed, means for supplying wash liquid and means for removing suspended solid particles, and near the opposite end of the column provided with a non movable screening device for supplying pressurized liquid suspension, the withdrawal of liquid from the suspension out of the column and the transport of the compacted bed of solids, which screening device consists of two parallel circular plates mounted perpendicular to the axis of the column and having diameters equal to the inner diameter of the column of which part of the plate facing the scraper is permeable for liquid and not permeable for the suspended solids, where the other part of said plate contains channels which extend into the other parallel plate which channels are the inlet ducts supplying suspension, which channels have no open connections to the space enclosed by the two parallel plates and which channels have a diameter which is at least one order larger than the diameter of the perforations in the plate facing the scraper.

2. A column according to claim 1, characterized in that the other parallel plate of the screening device not facing the scraper, is identical with the fixed wall closing the cylinder.

3. A column according to claim 1, characterized in that the other parallel plate of the screening device not facing the scraper, is not identical with the fixed wall closing the cylinder, and the channels connect the spaces at both sides exterior to the parallel plates and the space between the other parallel plate and the wall closing that end of the cylinder comprises means for supplying the liquid suspension.

0193226

4. A column according to claim 3, characterized in that part of the other parallel plate of the screening device not facing the scraper is permeable for liquid and not permeable for the suspension solids.

5

5. A column according to claim 1, 2, 3 or 4, characterized in that the channels in the screening device, extending into the two parallel plates of the screening device, have a diameter between 0.2 and 10 cm.

10

6. A column according to claim 5, characterized in that the channels in the screening device, extending into the two parallel plates of the screening device, have a diameter between 0.5 and 3 cm.

15

7. A column according to claim 4, characterized in that the perforations in the plate at the side not facing the scraper have a substantially smaller diameter than the perforations of the plate facing the scraper.

20

8. A column according to claim 4, characterized in that the surface fraction of the perforations of the plate not facing the scraper is substantially smaller than the surface fraction of the perforations of the plate facing the scraper.

25

9. A column according to claim 3, characterized in that the plate of the screening device not facing the scraper is, except for the channels, not permeable for liquid and consists in whole or in part of a flexible membrane (106).

30

10. A column according to claim 3, characterized in that the plate (105) of the screening device not facing the scraper is, except for the channels, not permeable for liquid and is movable in the direction of the opposite plate.

0193226

11. A column according to claim 3, characterized in that a stirrer (5) is mounted in the space between the screening device and the fixed wall closing the cylindrical column where the liquid suspension is supplied.

5

12. A column according to claim 2, characterized in that the supply of liquid suspension takes place through channels emanating from a central feed pipe.

10

13. A column according to claim 1, characterized in that the scraper rotates along the axis of the cylindrical column in a plane perpendicular to that axis.

14. A column according to claim 13, characterized in that the scraper is movable in the direction of the axis of the cylindrical column and practices a pressure on the washed compacted bed sufficient to disintegrate the washed compacted bed.

20

15. A screening device for separating solid particles from a liquid suspension which comprises that between two parallel plates of which part of the plates is permeable for liquid, and not permeable for the solid particles where the other part contains channels which connect the spaces at both sides

25 exterior the parallel plates and which channels have a diameter which is at least one order larger than the diameter of the perforations in the plates, and means to withdraw the liquid phase permeated through the plates out of the screening device.

30

16. A screening device according to claim 15, characterized in that the channels in the screening device, which connect the spaces at both sides exterior the parallel plates, have a diameter of 0.2-10 cm.

17. A screening device according to claim 16, characterized in that the channels in the screening device, which connect the spaces at both sides exterior the parallel plates, have a diameter of 0.5-3 cm.

5

18. A screening device according to claim 13, characterized in that one plate is, except for the channels, not permeable for liquid and consists in whole or in part of a flexible membrane (106).

10

19. A screening device according to claim 13, characterized in that one plate (105) is, except for the channels, not permeable for liquid and is movable in the direction of the opposite plate.

15

20. An equipment for separating solid particles from a liquid suspension and/or purification or leaching of solid particles comprising

- a column according to claims 1-14,
- 20 - a pump (13) connected with the feed line to the column, a closed expansion vessel (14) which is partly filled with gas
- an expansion vessel (24), which is partly filled with gas, connected to the recirculation line after the heat exchanger
- 25 (19)
- at least one sensor indicating the concentration difference that exists between the liquid solution and the wash liquid
- means for partly recirculating the wash liquid to the column
- 30 - valves (10), (11) controlling the supply of the liquid suspension and the withdrawal of liquid phase permeated through the plates of the screening device, respectively.

0193226

21. A process for separating solid particles from a
5 liquid suspension and/or purification or leaching of solid
particles in a column based on the pulsating movement of a
compacted bed in this column to which a liquid suspension,
under withdrawal of liquid phase, is supplied pulsewise at one
end of the column and the washed compacted bed is disintegrat-
10 ed, while the product of this disintegration is removed at the
opposite end of the column and the washfront in the compacted
bed is moved between two outmost limits in the compacted bed
characterized in that the energy for the compacting and
filtering of the suspension, the transport of the compacted
15 bed to the scraper and the washing are supplied by the feeding
pump 13, while the pressures in the wash column P₂ and P₃ are
determined by permeability and length of the compacted bed,
the feed rate of the suspension, the fraction of suspended
solids in the feed, the wall friction and the pressure of the
20 scraper against the bed.

22. A process according to claim 17 characterized in that
a total cycle of the feeding and washing amounts between 0.1
and 40 seconds.

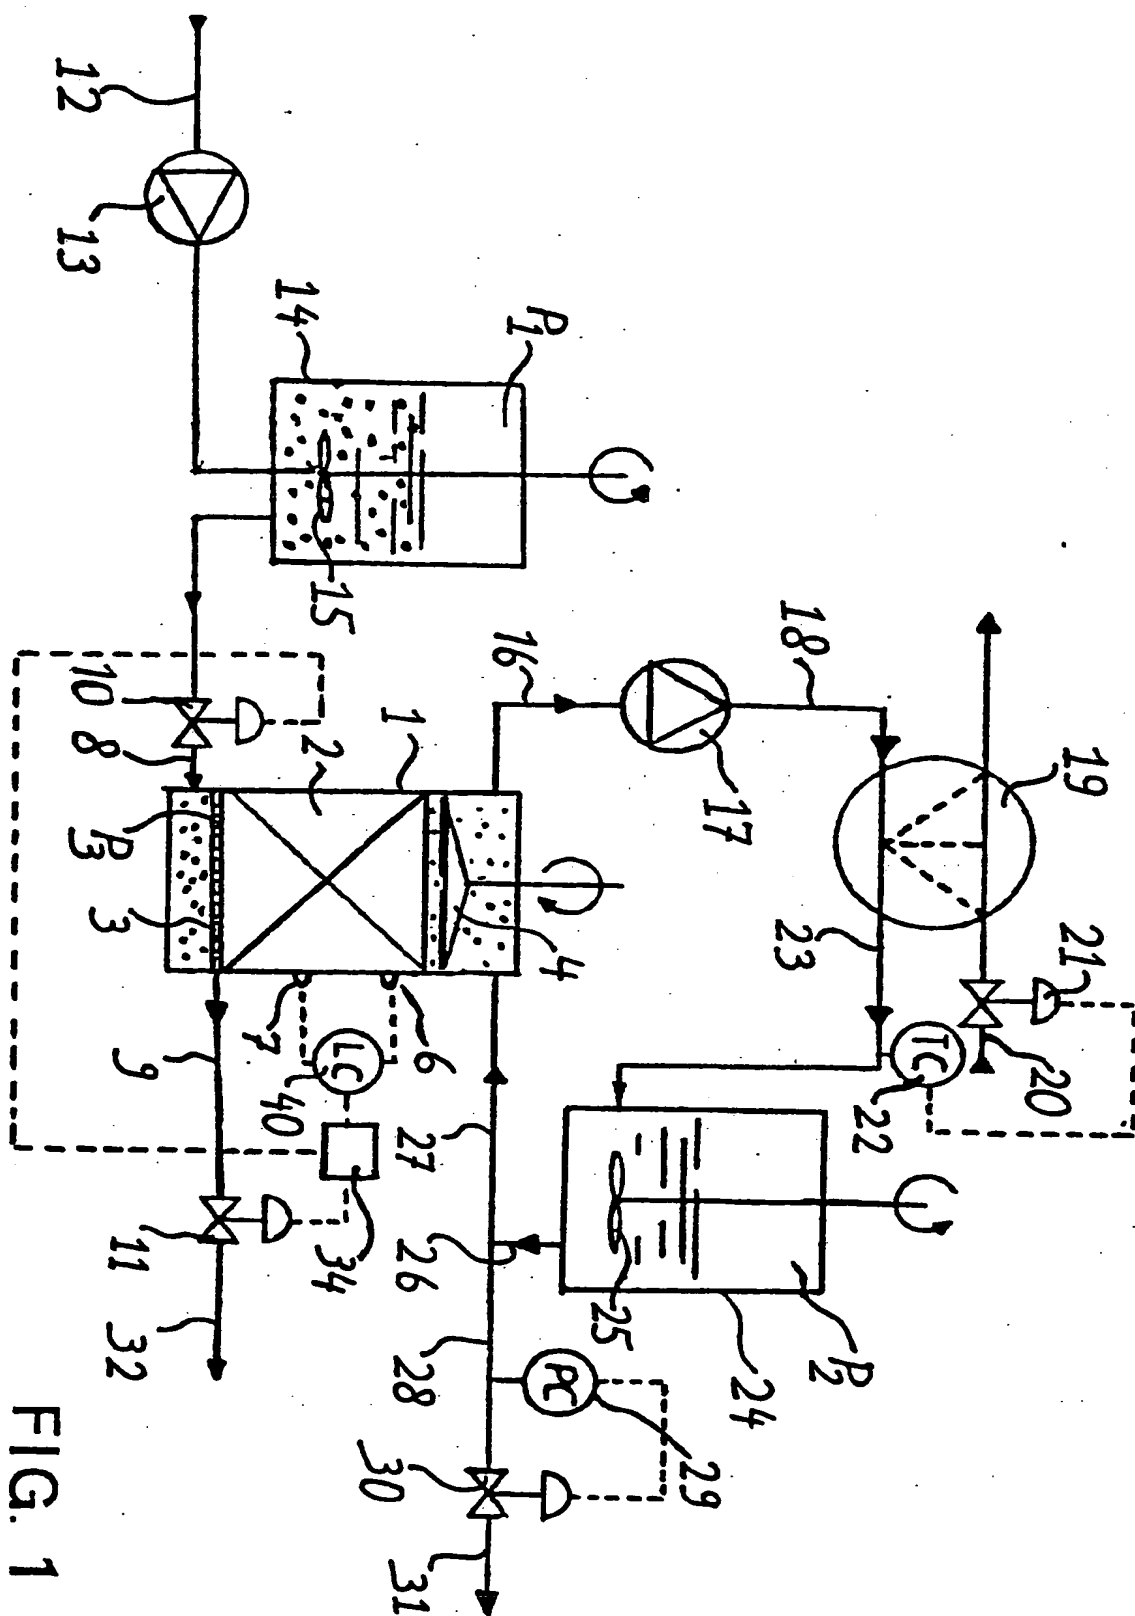


FIG. 1

2/6

0193226




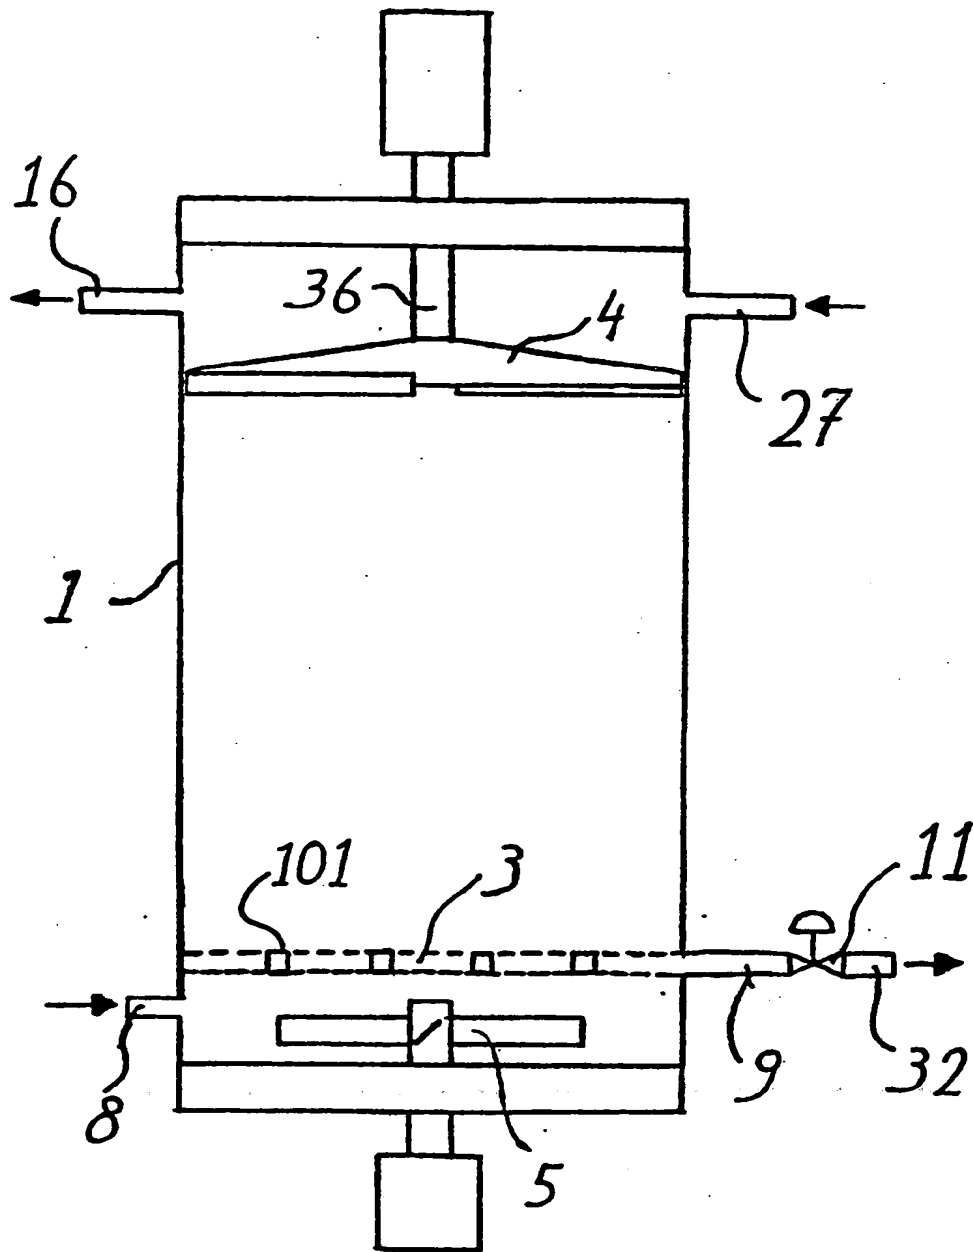


FIG. 2

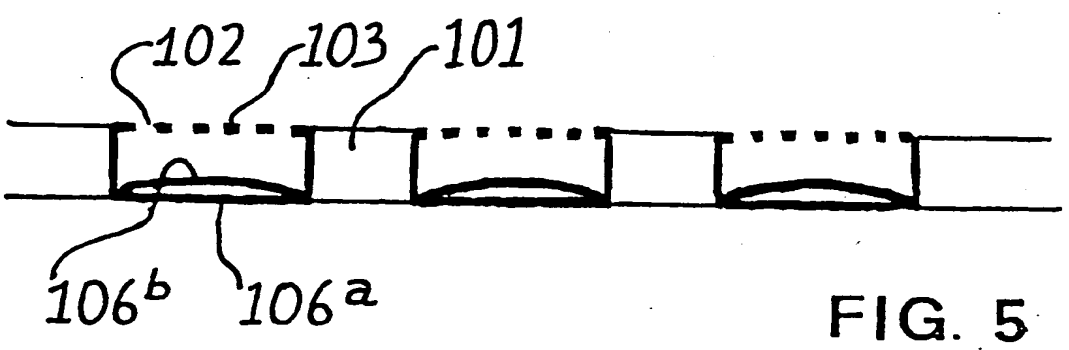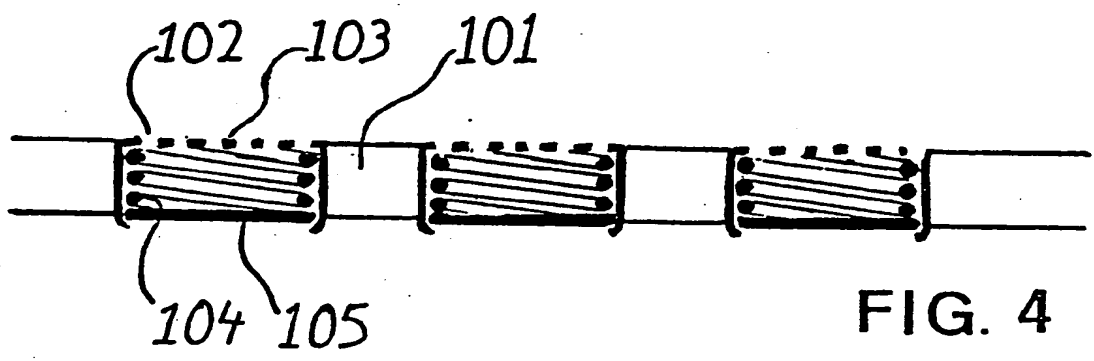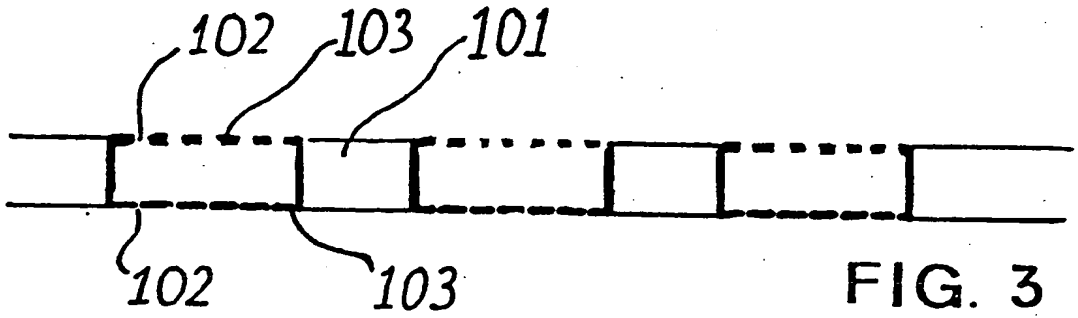

4/6

0193226

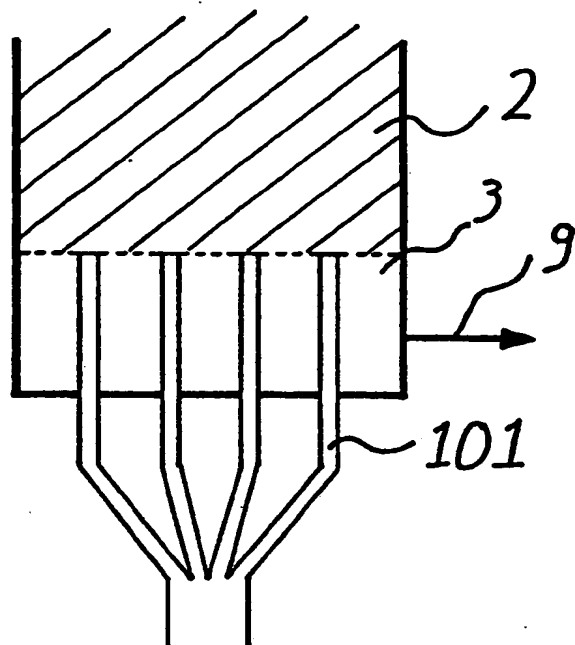


FIG. 6

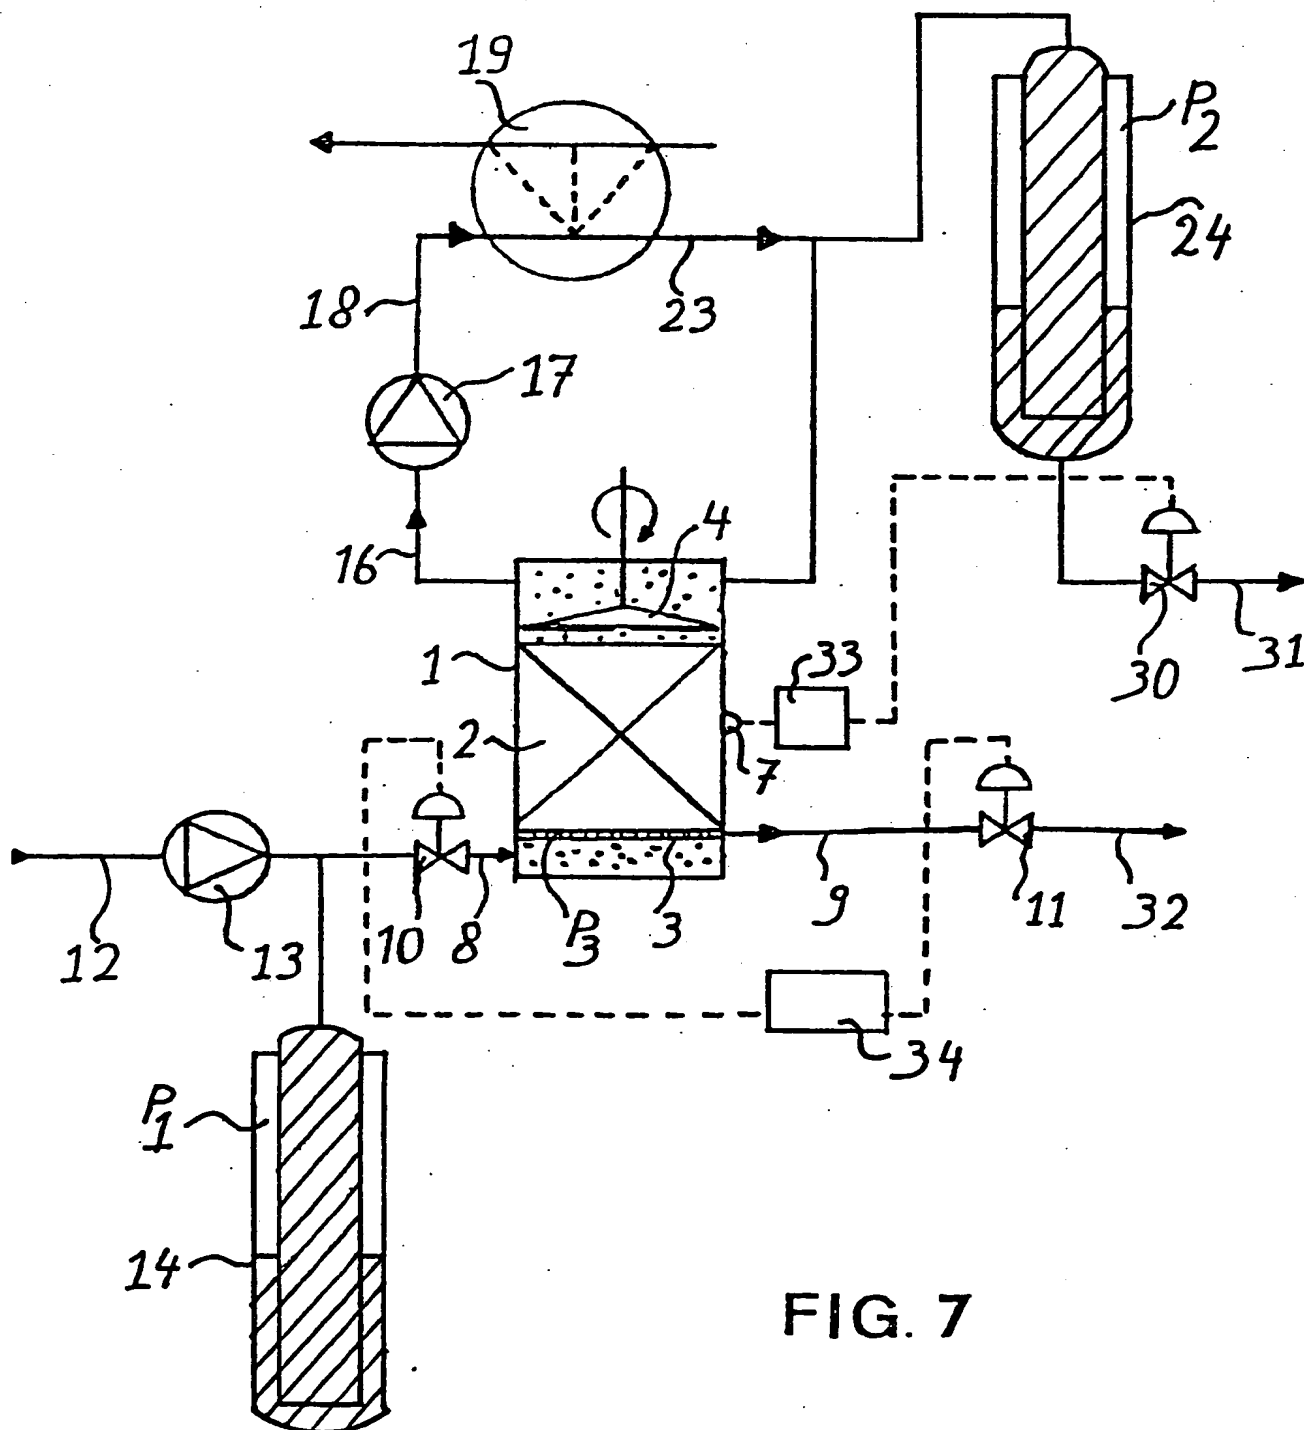


FIG. 7

6/6

0193226

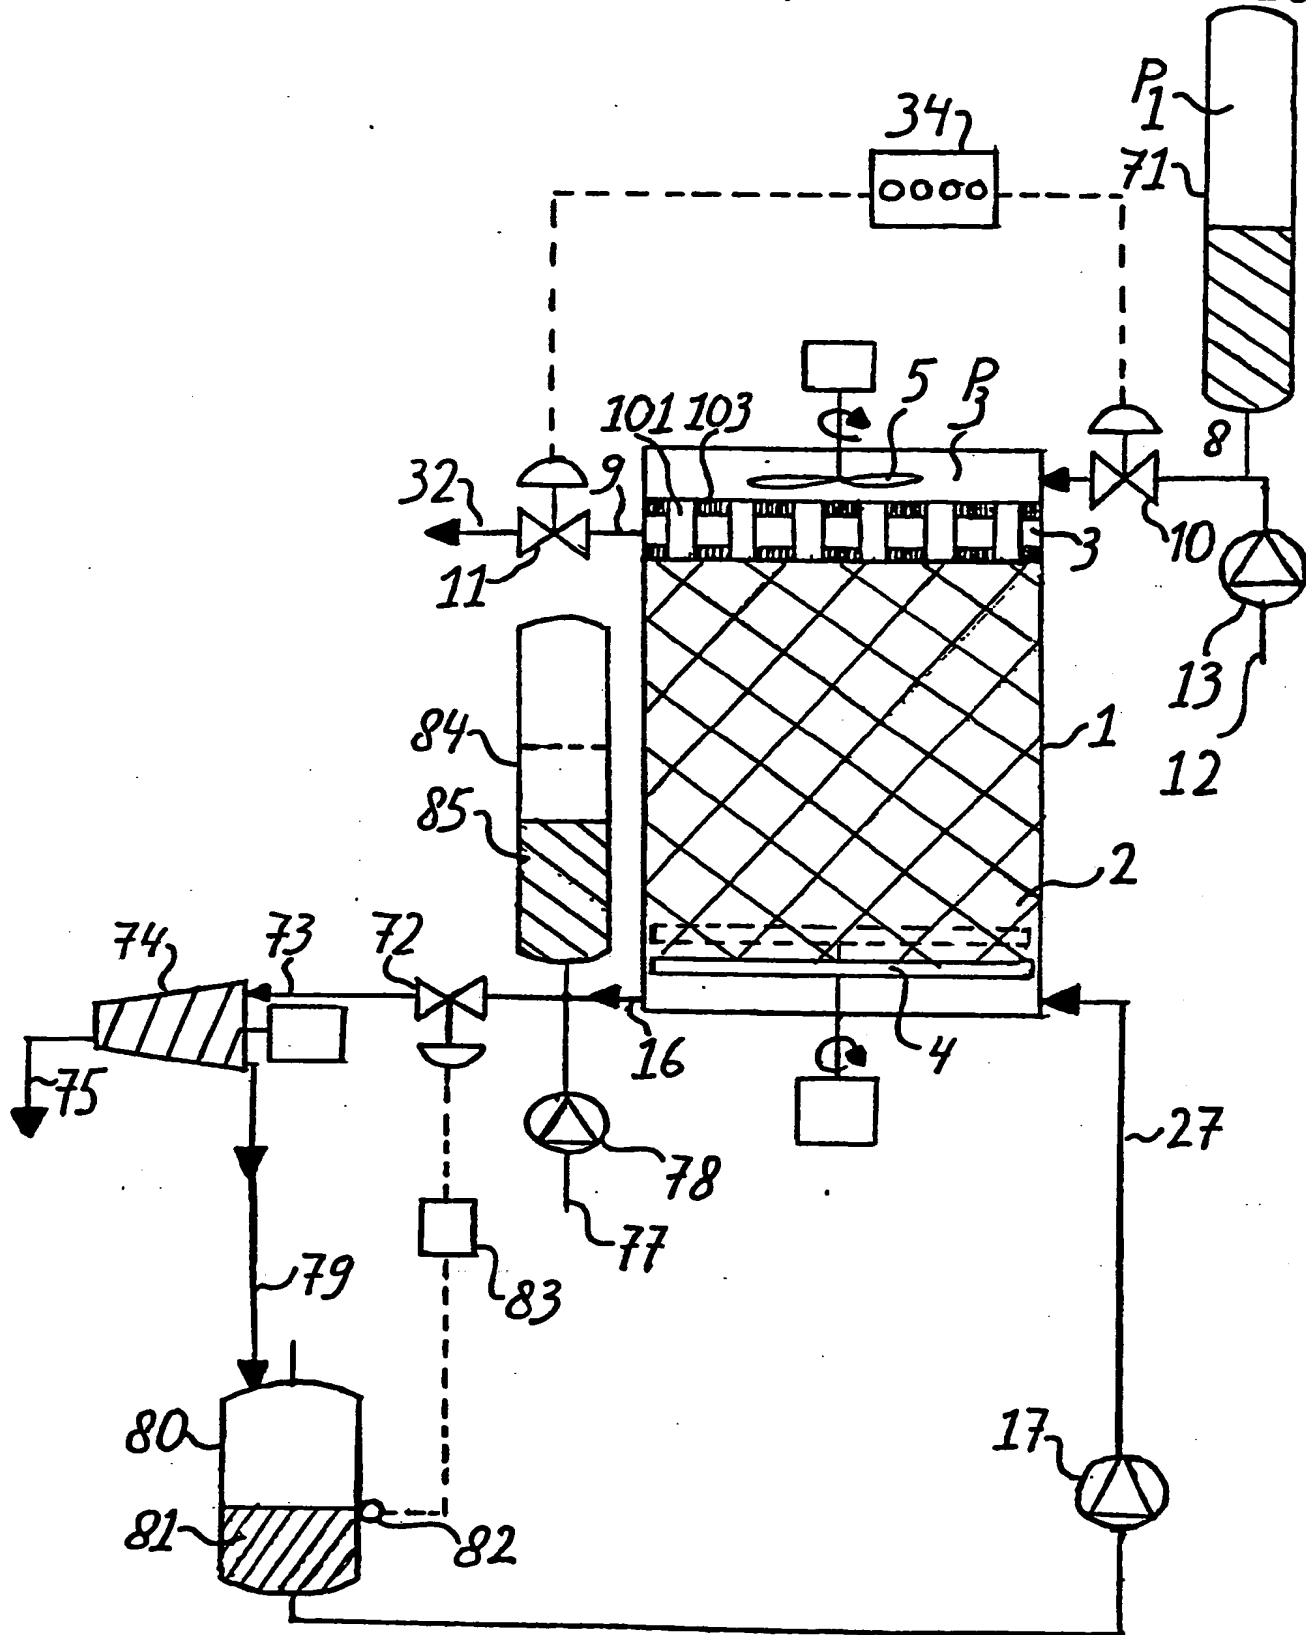


FIG. 8



European Patent
Office

EUROPEAN SEARCH REPORT

0193226

Application number

EP 86 20 0197

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int Cl 4)
A	AU-A- 429 575 (M.L. GOLDBERG) * Figure 1 *	1	B 01 D 9/02 C 02 F 1/22
A	FR-A-1 215 936 (CARRIER CORP.) * Figures 1-5 *	1	
A	US-A-3 070 969 (C.M. ASHLEY et al.) * Whole document *	1	
A	FR-A- 777 929 (SOCIETE DAUBRON) * Whole document *	1	
D,A	US-A-3 872 009 (H.A.C. THIJSSSEN) * Whole document *	1	
			TECHNICAL FIELDS SEARCHED (Int Cl 4)
			B 01 D C 02 F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21-03-1986	Examiner VAN AKOLEYEN H.T.M.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding, document	

EPO Form 1503 03/82

THIS PAGE BLANK (USPTO)